



TP HINGES


toilet

Full Surface

FS-901-TP 1/8" Offset Spring-Loaded
FS-501-TP 1/8" Offset



This hinge is to be used with a 1-1/4" pilaster and 1" door assembly. Stainless steel continuous toilet partitions are excellent for retrofit or constructing a new facility, where a high volume of abusive traffic can be found.

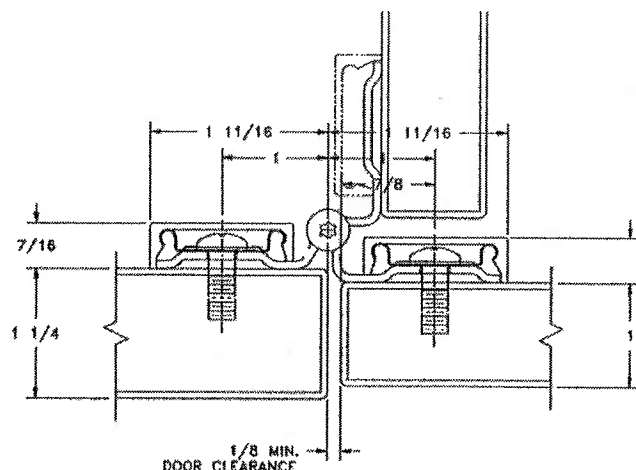

Standard Features

Material

Heavy-duty 14 gauge 304 stainless steel.

Finishes

US 32D brushed stainless steel (630).

Pin and Barrel Type Hinge

- 1/4" diameter stainless steel pin.
- Long-life split nylon bearings.
- 28 bearing surfaces.

Torx Adjusting Screw

(with Spring-Loaded hinges only)

- Torx tip cap.
- Internal stainless steel spring mechanism.
- Adjust tension on door to close tightly for out-swinging ADA compliance.
- Allows door to stay open in predetermined position.

Mounting Hardware

- 1/4 20 pan head machine screws.
- Cover caps conceal all mounting hardware.

Capacity

Supports weights up to 80 lbs.

Sizes

54" and 57"

Non-Handed

Use the same hinge for right or left handed doors.

Optional Features

- 84 powder coated paint colors
- Custom lengths (in inches).
- Custom hole pattern.
- Tamper-proof security screws.



Markar Products, Inc.

68 Ward Road • Lancaster, NY 14086 • 716-685-4104 • Toll Free: 1-800-868-1688 • Fax: 716-685-3919

Baker

MICHAEL BAKER JR. INC.
 801 Cromwell Park Drive
 Suite 110
 Glen Burnie, MD 21061

PROJECT TITLE

RESTROOM DESIGN STANDARDS

SHEET TITLE

TOILET PARTITIONS AND DOOR HARDWARE-14

SCALE NONE

DATE MARCH 2005

PROJECT NO.

TASK 1314.20

B-14