



TP HINGES
t o i l e t

Full Surface



This hinge was designed for detention facilities or areas where vandalism is common. The hinge can be mechanically fastened or welded in place for optimum security.

FS-910-TP Flush Spring-Loaded FS-510-TP Flush

Standard Features

Material

Heavy-duty 14 gauge 304 stainless steel.

Finishes

US 32D brushed stainless steel (630).

Pin and Barrel Type Hinge

- 1/4" diameter stainless steel pin.
- Long-life split nylon bearings.
- 28 bearing surfaces.

Torx Adjusting Screw

(with Spring-Loaded hinges only)

- Torx tip cap.
- Internal stainless steel spring mechanism.
- Adjust tension on door to close tightly for out-swinging ADA compliance.
- Allows door to stay open in predetermined position.

Mounting Hardware

10-24 flat head stainless steel machine screws.

Capacity


Supports weights up to 80 lbs.

Sizes

54" and 57"

Non-Handed

Use the same hinge for right or left handed doors.

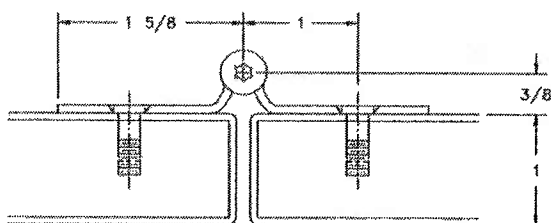

Optional Features

- US 32 bright polished stainless steel (629).
- 84 powder coated paint colors
- Custom lengths (in inches).
- Custom hole pattern.
- Tamper-proof security screws.
- One way shoulder bolt and screws.



Markar Products, Inc.

68 Ward Road • Lancaster, NY 14086 • 716-685-4104 • Toll Free: 1-800-866-1688 • Fax: 716-685-3919

Baker

MICHAEL BAKER JR. INC.
801 Cromwell Park Drive
Suite 110
Glen Burnie, MD 21061

PROJECT TITLE

RESTROOM DESIGN STANDARDS

SHEET TITLE

TOILET PARTITIONS AND DOOR HARDWARE-18

SCALE

NONE

DATE

MARCH 2005

PROJECT NO.

TASK 1314.20

B-18